
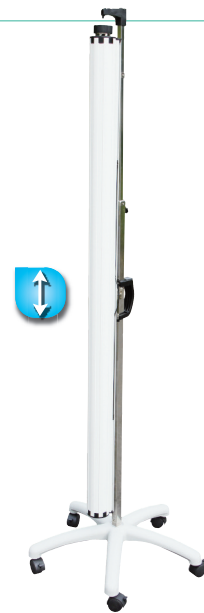
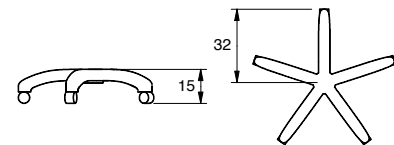


Front and side view

- A Image height
- B Image base
- F Casing length
- G Height/floor
- H Foot height
- I Foot depth
- J Foot width

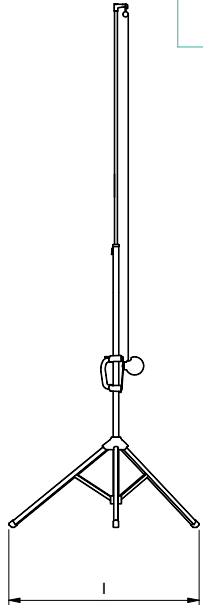

Technical data

| Reference | A cm | B cm | F cm | G (min/max) cm | H cm | I cm | J cm | Closed screen cm | Net weight kg |
|-------------------------------------|------|------|------|----------------|------|------|------|------------------|---------------|
| Square format - Tripod | | | | | | | | | |
| TRE06B1150150 | 150 | 150 | 172 | 70 /95 | 247 | 86 | 76 | 187x16x25 | 10 |
| TRE06B1180180 | 180 | 180 | 202 | 70 /117 | 299 | 97 | 84 | 217x16x25 | 13 |
| TRE06B1200200 | 200 | 200 | 222 | 70 /97 | 299 | 97 | 84 | 237x16x25 | 19 |
| TRE06B1240240 | 240 | 240 | 262 | 70 /57 | 299 | 97 | 84 | 277x16x25 | 22 |
| 4:3 format - Tripod | | | | | | | | | |
| TRE06B1180240 | 180 | 240 | 262 | 70 /57 | 299 | 97 | 84 | 277x16x25 | 21 |
| Square format - 5-foot Stand | | | | | | | | | |
| PIE06B1150150 | 150 | 150 | 172 | 70 /95 | 247 | - | - | 187x65x65 | 10 |
| PIE06B1180180 | 180 | 180 | 202 | 70 /117 | 299 | - | - | 217x65x65 | 13 |
| PIE06B1200200 | 200 | 200 | 222 | 70 /97 | 299 | - | - | 237x65x65 | 19 |

Very robust and extremely easy to use. They are the ideal compromise for all projections that just need temporary installation.

Aluminum case with a white Epoxy varnish finish withstanding torsion.

- Supplied with a keystone eliminator for parallax compensation.
- Ultra-robust handle in Zamak.
- Fire-resistant projection surface



Chemin de Beaurepaire
CS 42005
91410 DOURDAN
FRANCE
Tel +33 (0)1 64 59 94 54

www.oray.fr